



Public Data-based Report



Validation Report Service

Cryo-EM Map Validation Report

Report to assess Cryo-EM Volume Map at Level(s) 0

This report has been generated based on data publicly available at [EMDB](#).

Basic Entry Information:

EMDB ID: [EMD-5467](#)

Title: 4.2 Angstrom Cryo-EM structure of Ad5F35

Authors: [See EMDB entry link](#)

Deposited on: 2012-08-10T00:00:00

Reported Resolution: 4.2 Å

Contact Us:

Instruct Image Processing Center ([I²PC](#))

Biocomputing Unit ([BCU](#))

i2pc@cnb.csic.es

[VRS Website](#)

National Center for Biotechnology (CNB)
St/ Darwin, 3 (Autonomous University of Madrid)
28049 Cantoblanco, Madrid (Spain)

Last update: **September 21, 2024, 3:16pm**

Context

Cryo-electron microscopy is currently one of the most active techniques in Structural Biology. The number of maps deposited at the [Electron Microscopy Data Bank](#) is rapidly growing every year and keeping the quality of the submitted maps is essential to maintain the scientific quality of the field. The ultimate quality measure is the consistency of the map and an atomic model. However, this is only possible for high resolution maps. Over the years there have been many suggestions about validation measures of 3DEM maps. Unfortunately, most of these measures are not currently in use for their spread in multiple software tools and the associated difficulty to access them. To alleviate this problem, we made available a validation grading system that evaluate the information provided to assess the map.

This system grades a map from 0 to 5 depending on the amount of information available. In this way, a map could be validated at Level 0 (the deposited map), 1 (two half maps), 2 (2D classes), 3 (particles), 4 (... + angular assignment), 5 (... + micrographs and coordinates). In addition, we can have three optional qualifiers: A (... + atomic model), W (... + image processing workflow), and O (... + other techniques).

This Validation Report Service is explained in more detail in this [paper](#). For more information about the different methods and softwares used for this report, see the references [here](#).

Summarized overall quality

The map seems to have some problem in its centering or extra space (see Sec. [2.1](#)). There seems to be a problem with the suggested threshold (see Sec. [2.2](#)). There seems to be a problem with the map's background (see Sec. [2.3](#)). There seems to be a problem with its B-factor (see Sec. [2.4](#)).

The average resolution of the map estimated by various methods goes from 4.2Å to 4.2Å with an average of 4.2Å. The resolution reported by the user was 4.2Å.

The overall score (passing tests) of this report is 4 out of 8 evaluable items.

0.a Mass analysis	Sec. 2.1	6 warnings
0.b Mask analysis	Sec. 2.2	2 warnings
0.c Background analysis	Sec. 2.3	2 warnings
0.d B-factor analysis	Sec. 2.4	1 warnings
0.e DeepRes	Sec. 2.5	OK
0.f LocBfactor	Sec. 2.6	OK
0.g LocOccupancy	Sec. 2.7	OK
0.h DeepHand	Sec. 2.8	OK

Summary of the warnings across sections.

Section 2.1 (0.a Mass analysis)

1. **There could be little space from X left to effectively correct for the CTF.**
2. **There could be little space from Y left to effectively correct for the CTF.**
3. **There could be little space from Z left to effectively correct for the CTF.**
4. **There could be little space from X right to effectively correct for the CTF.**
5. **There could be little space from Y right to effectively correct for the CTF.**
6. **There could be little space from Z right to effectively correct for the CTF.**

Section 2.2 (0.b Mask analysis)

1. **There might be a problem of connectivity at this threshold because more than 5 connected components are needed to reach 95% of the total mask. Probably a smaller threshold will not cause this issue.**
2. **There might be a problem in the construction of the mask, because the overlap is smaller than 0.75. A common reason is that the suggested threshold causes too many disconnected components.**

Section 2.3 (0.c Background analysis)

1. **The null hypothesis that the background mean is 0 has been rejected because the p-value of the comparison is smaller than 0.001**
2. **There is a significant proportion of outlier values in the background (cdf5 ratio=8536.54)**

Section 2.4 (0.d B-factor analysis)

1. **The B-factor is out of the interval [-300,0]. It is over-sharpened.**

Contents

1	Input data	7
2	Level 0 analysis	18
2.1	Level 0.a Mass analysis	18
2.2	Level 0.b Mask analysis	19
2.3	Level 0.c Background analysis	26
2.4	Level 0.d B-factor analysis	28
2.5	Level 0.e Local resolution with DeepRes	31
2.6	Level 0.f Local B-factor	34
2.7	Level 0.g Local Occupancy	37
2.8	Level 0.h Hand correction	40

1 Input data

Input map: emd_5467.map

SHA256 hash: 303ca84991272c756995c009d4bd930cbae83ef3f6cdf1b93175cad705e42633

Voxel size: 1.150000 (Å)

Visualization threshold: 13.000000

Resolution estimated by user: 4.2


Orthogonal slices of the input map

Explanation:


In the orthogonal slices of the map, the noise outside the protein should not have any structure (stripes going out, small blobs, particularly high or low densities, ...)

Results:


See Fig. [1](#).

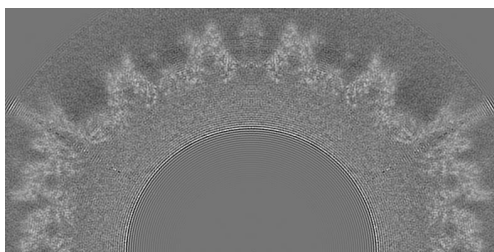

(a) X Slice 392

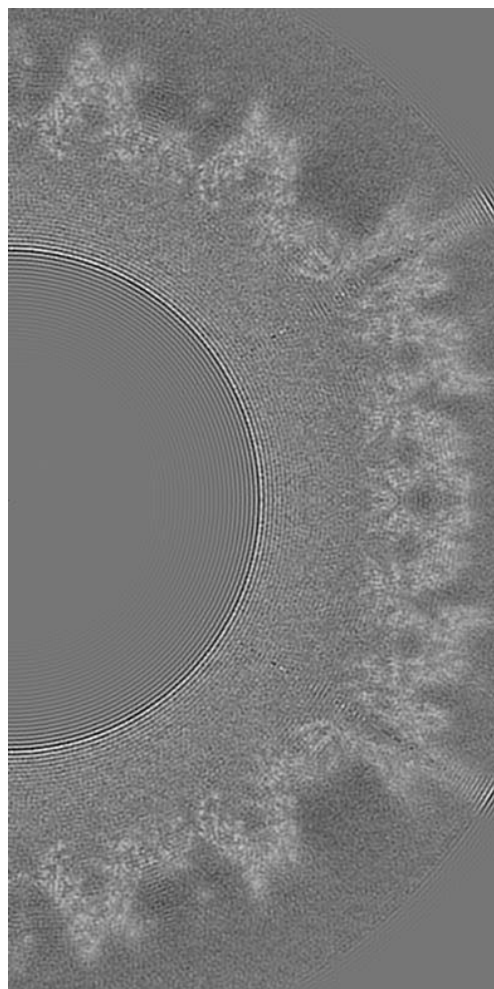

(b) Y Slice 392

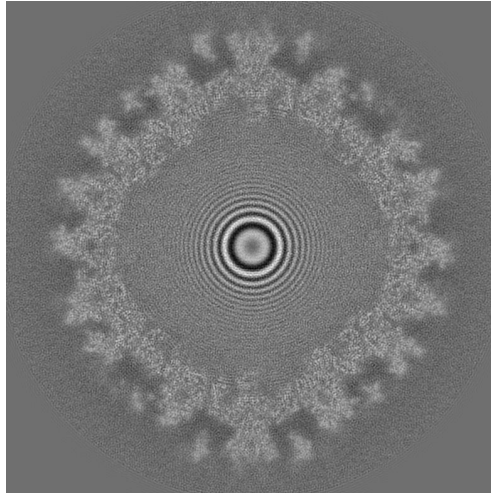


(c) Z Slice 196

Figure 1: Central slices of the input map in the three dimensions


Orthogonal slices of maximum variance of the input map

Results:


See Fig. [2](#).

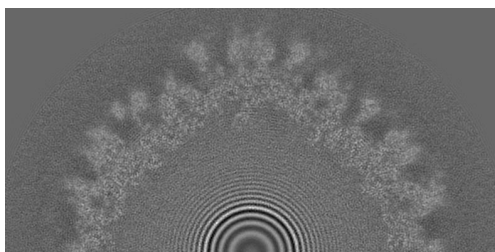

(a) X Slice 205

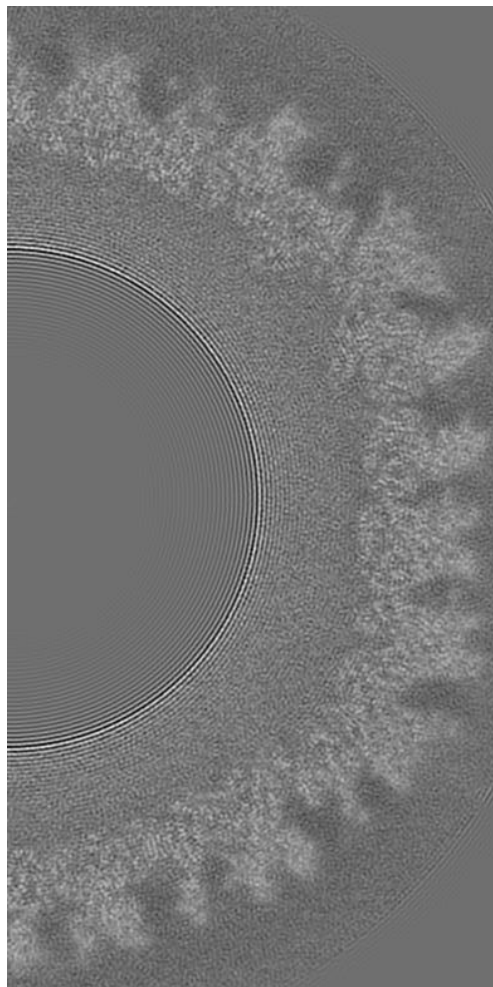

(b) Y Slice 377

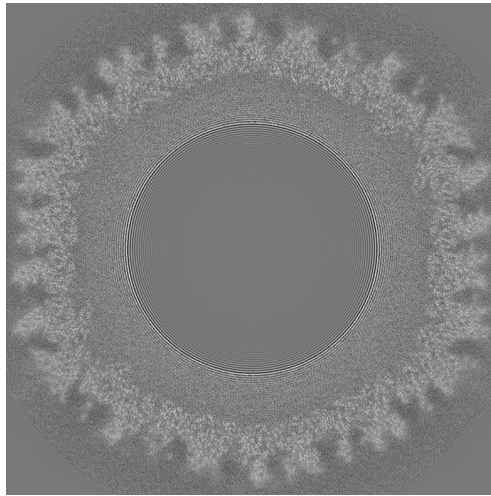

(c) Z Slice 15

Figure 2: Slices of maximum variation in the three dimensions


Orthogonal projections of the input map

Explanation:


In the projections there should not be stripes (this is an indication of directional overweighting, or angular attraction), and there should not be a dark halo around or inside the structure (this is an indication of incorrect CTF correction or the reconstruction of a biased map).

Results:


See Fig. [3](#).

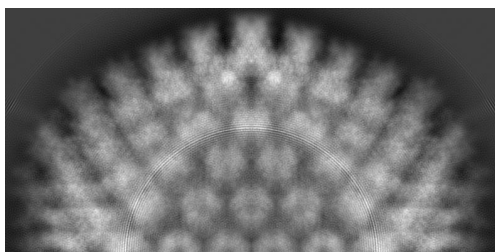

(a) X Projection

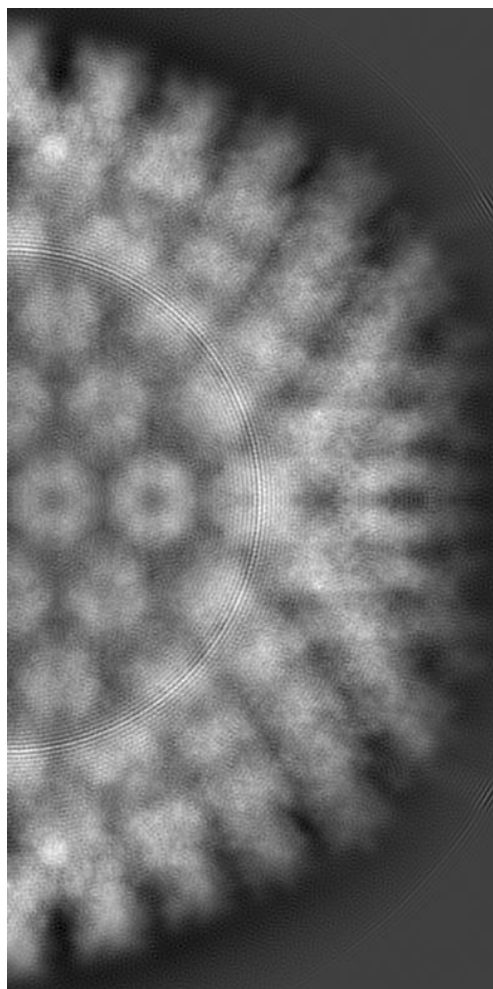

(b) Y Projection

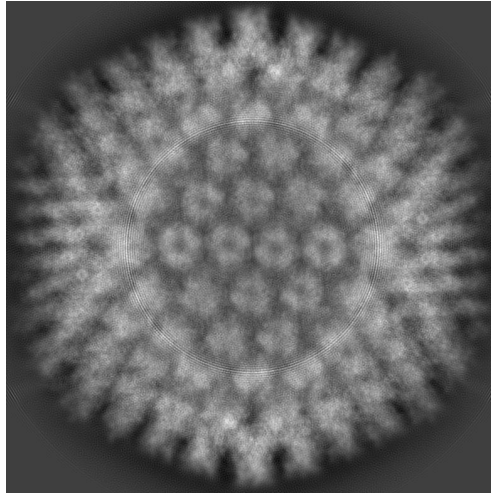

(c) Z Projection

Figure 3: Projections in the three dimensions


Isosurface views of the input map

Explanation:


An isosurface is the surface of all points that have the same gray value. In these views there should not be many artifacts or noise blobs around the map.

Results:


See Fig. 4.

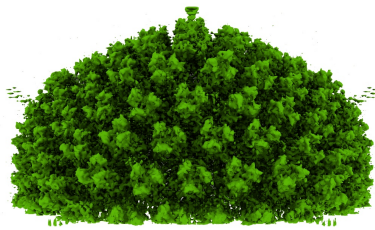

(a) View 1



(b) View 2



(c) View 3

Figure 4: Isosurface at threshold=13.000000. Views generated by ChimeraX at the following X, Y, Z angles: View 1 (0, -90, -90), View 2 (-90, 0, -90), View 3 (0, 0, 0).

Orthogonal slices of maximum variance of the mask with hard borders

Explanation:


The mask with hard borders has been calculated at the suggested threshold 13.000000, the largest connected component was selected, and then dilated by 2Å.

Results:


See Fig. [5](#).



(a) X Slice 410

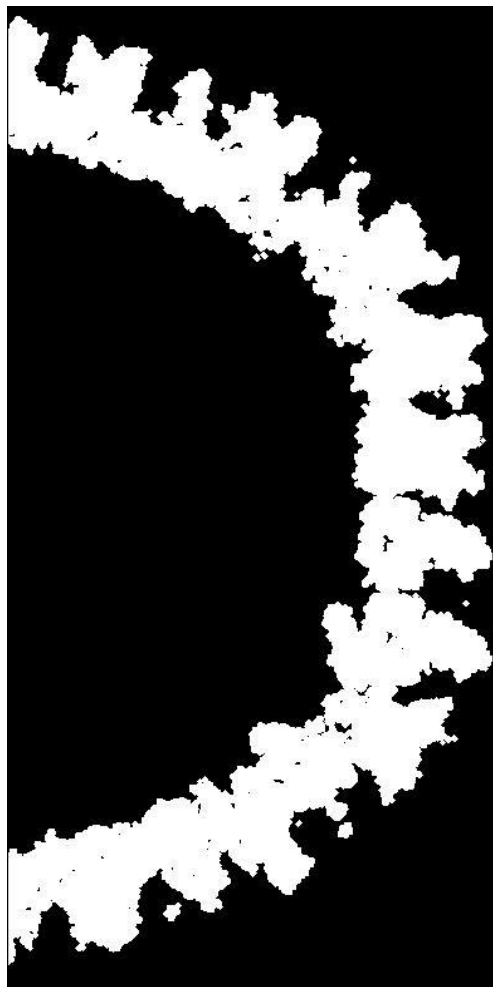

(b) Y Slice 408

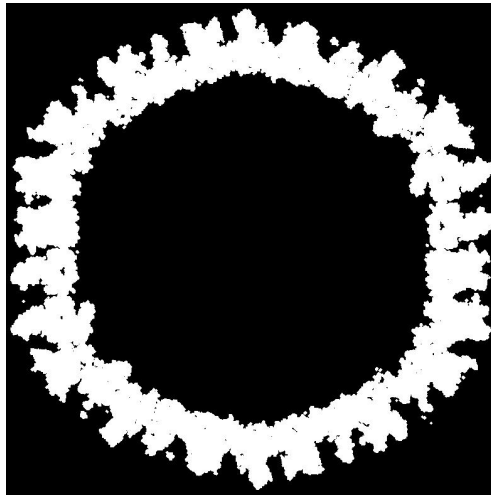

(c) Z Slice 16

Figure 5: Slices of maximum variation in the three dimensions of the mask with hard borders

Orthogonal slices of maximum variance of the mask with soft borders

Explanation:


The mask with soft borders has been calculated at the suggested threshold 13.000000, the largest connected component was selected, and then dilated by 2Å.

Results:


See Fig. 6.



(a) X Slice 409

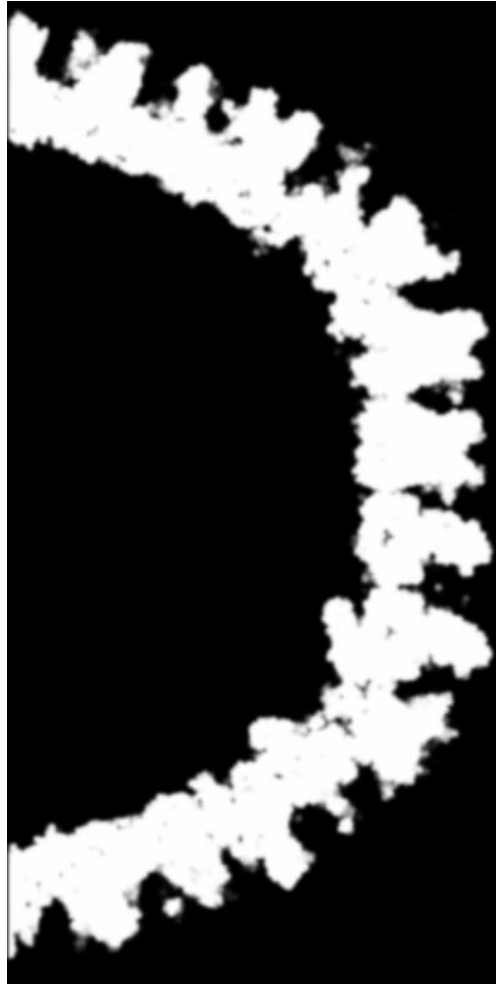

(b) Y Slice 409

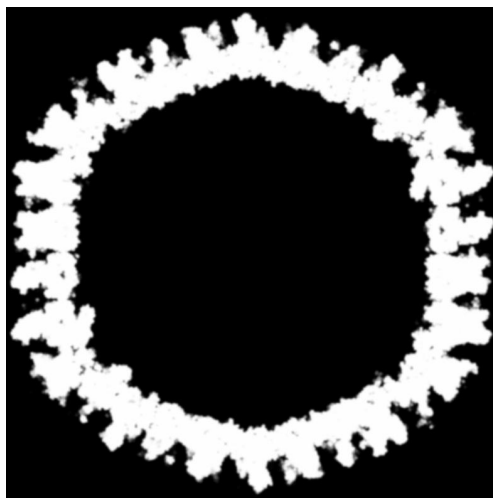

(c) Z Slice 17

Figure 6: Slices of maximum variation in the three dimensions of the mask with soft borders

2 Level 0 analysis

2.1 Level 0.a Mass analysis

Explanation:

The reconstructed map must be relatively well centered in the box, and there should be at least $30\text{\AA}$ (the exact size depends on the CTF) on each side to make sure that the CTF can be appropriately corrected.

Results:

The space from the left and right in X are 6.90 and 6.90 $\text{\AA}$, respectively. There is a decentering ratio $(\text{abs}(\text{Right-Left})/\text{Size})\%$ of 0.00%

The space from the left and right in Y are 6.90 and 6.90 $\text{\AA}$, respectively. There is a decentering ratio $(\text{abs}(\text{Right-Left})/\text{Size})\%$ of 0.00%

The space from the left and right in Z are 1.15 and 5.75 $\text{\AA}$, respectively. There is a decentering ratio $(\text{abs}(\text{Right-Left})/\text{Size})\%$ of 1.02%

The center of mass is at $(x,y,z)=(392.12,392.11,140.17)$. The decentering of the center of mass $(\text{abs}(\text{Center})/\text{Size})\%$ is 0.02, 0.01, and 14.24, respectively.

Automatic criteria: The validation is OK if 1) the decentering and center of mass less than 20% of the map dimensions in all directions, and 2) the extra space on each direction is more than 20% of the map dimensions. For local and focused refinement, or similar, warnings are expected.

WARNINGS: 6 warnings

1. **There could be little space from X left to effectively correct for the CTF.**
2. **There could be little space from Y left to effectively correct for the CTF.**
3. **There could be little space from Z left to effectively correct for the CTF.**
4. **There could be little space from X right to effectively correct for the CTF.**
5. **There could be little space from Y right to effectively correct for the CTF.**
6. **There could be little space from Z right to effectively correct for the CTF.**

2.2 Level 0.b Mask analysis

Explanation:

The map at the suggested threshold should have most of its mass concentrated in a single connected component. It is normal that after thresholding there are a few thousands of very small, disconnected noise blobs. However, there total mass should not exceed 10%. The raw mask (just thresholding) and the mask constructed for the analysis (thresholding + largest connected component + dilation) should significantly overlap. Overlap is defined by the overlapping coefficient $(\text{size}(\text{Raw AND Constructed})/\text{size}(\text{Raw}))$ that is a number between 0 and 1, the closer to 1, the more they agree.

Results:

Raw mask: At threshold 13.000000, there are 290068 connected components with a total number of voxels of 20495065 and a volume of 31170431.98 Å³ (see Fig. 7). The size and percentage of the total number of voxels for the raw mask are listed below (up to 95% of the mass or the first 100 clusters, whatever happens first), the list contains (No. voxels (volume in Å³), percentage, cumulated percentage):


(15146665 (23036184.13), 73.90, 73.90)(2418924 (3678881.04), 11.80, 85.71)(350523 (533101.67), 1.71, 87.42)(272875 (415008.77), 1.33, 88.75)(192691 (293058.92), 0.94, 89.69)(35395 (53831.37), 0.17, 89.86)(34915 (53101.35), 0.17, 90.03)(1556 (2366.48), 0.01, 90.04)(1506 (2290.44), 0.01, 90.05)(1458 (2217.44), 0.01, 90.05)(1262 (1919.34), 0.01, 90.06)(1127 (1714.03), 0.01, 90.07)(1109 (1686.65), 0.01, 90.07)(1051 (1598.44), 0.01, 90.08)(1044 (1587.79), 0.01, 90.08)(1027 (1561.94), 0.01, 90.09)(1016 (1545.21), 0.00, 90.09)(994 (1511.75), 0.00, 90.10)(950 (1444.83), 0.00, 90.10)(895 (1361.18), 0.00, 90.10)(878 (1335.33), 0.00, 90.11)(865 (1315.56), 0.00, 90.11)(827 (1257.76), 0.00, 90.12)(822 (1250.16), 0.00, 90.12)(819 (1245.60), 0.00, 90.13)(819 (1245.60), 0.00, 90.13)(754 (1146.74), 0.00, 90.13)(753 (1145.22), 0.00, 90.14)(729 (1108.72), 0.00, 90.14)(719 (1093.51), 0.00, 90.14)(718 (1091.99), 0.00, 90.15)(700 (1064.61), 0.00, 90.15)(681 (1035.72), 0.00, 90.15)(674 (1025.07), 0.00, 90.16)(657 (999.21), 0.00, 90.16)(649 (987.05), 0.00, 90.16)(645 (980.96), 0.00, 90.17)(637 (968.80), 0.00, 90.17)(631 (959.67), 0.00, 90.17)(629 (956.63), 0.00, 90.18)(628 (955.11), 0.00, 90.18)(626 (952.07), 0.00, 90.18)(611 (929.25), 0.00, 90.18)(600 (912.52), 0.00, 90.19)(599 (911.00), 0.00, 90.19)(593 (901.88), 0.00, 90.19)(589 (895.80), 0.00, 90.20)(588 (894.27), 0.00, 90.20)(585 (889.71), 0.00, 90.20)(579 (880.59), 0.00, 90.21)(579 (880.59), 0.00, 90.21)(577 (877.54), 0.00, 90.21)(575 (874.50), 0.00, 90.21)(557 (847.13), 0.00, 90.22)(548 (833.44), 0.00, 90.22)(547 (831.92), 0.00, 90.22)(539 (819.75), 0.00, 90.22)(533 (810.63), 0.00, 90.23)(528 (803.02), 0.00, 90.23)(527 (801.50), 0.00, 90.23)(521 (792.38), 0.00, 90.23)(512 (778.69), 0.00, 90.24)(511 (777.17), 0.00, 90.24)(502 (763.48), 0.00, 90.24)(499 (758.92), 0.00, 90.24)(498 (757.40), 0.00, 90.25)(497 (755.87), 0.00, 90.25)(494 (751.31), 0.00, 90.25)(494 (751.31), 0.00, 90.25)(490 (745.23), 0.00, 90.26)(478 (726.98), 0.00, 90.26)(471 (716.33), 0.00, 90.26)(464 (705.69), 0.00, 90.26)(452 (687.44), 0.00, 90.27)(449 (682.87), 0.00, 90.27)(447 (679.83), 0.00, 90.27)(444 (675.27), 0.00, 90.27)(444 (675.27), 0.00, 90.27)(442 (672.23), 0.00, 90.28)(440 (669.18), 0.00, 90.28)(434 (660.06), 0.00, 90.28)(433 (658.54), 0.00, 90.28)(426 (647.89), 0.00, 90.28)(426 (647.89), 0.00, 90.29)(425

(646.37), 0.00, 90.29)(424 (644.85), 0.00, 90.29)(423 (643.33), 0.00, 90.29)(417
(634.20), 0.00, 90.30)(415 (631.16), 0.00, 90.30)(415 (631.16), 0.00, 90.30)(414
(629.64), 0.00, 90.30)(411 (625.08), 0.00, 90.30)(408 (620.52), 0.00, 90.31)(407
(619.00), 0.00, 90.31)(405 (615.95), 0.00, 90.31)(403 (612.91), 0.00, 90.31)(402
(611.39), 0.00, 90.31)(401 (609.87), 0.00, 90.32)(401 (609.87), 0.00, 90.32)


Number of components to reach 95% of the mass: 35096

The average size of the remaining 254972 components is 4.02 voxels (1.52 $\text{\AA}^3$). Their size go from 13 voxels (19.77 $\text{\AA}^3$) to 1 voxels (1.52 $\text{\AA}^3$).


The slices of the raw mask can be seen in Fig. 7.

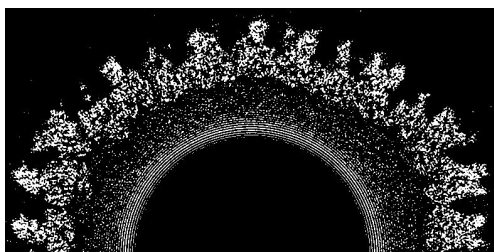

(a) X Slice 376

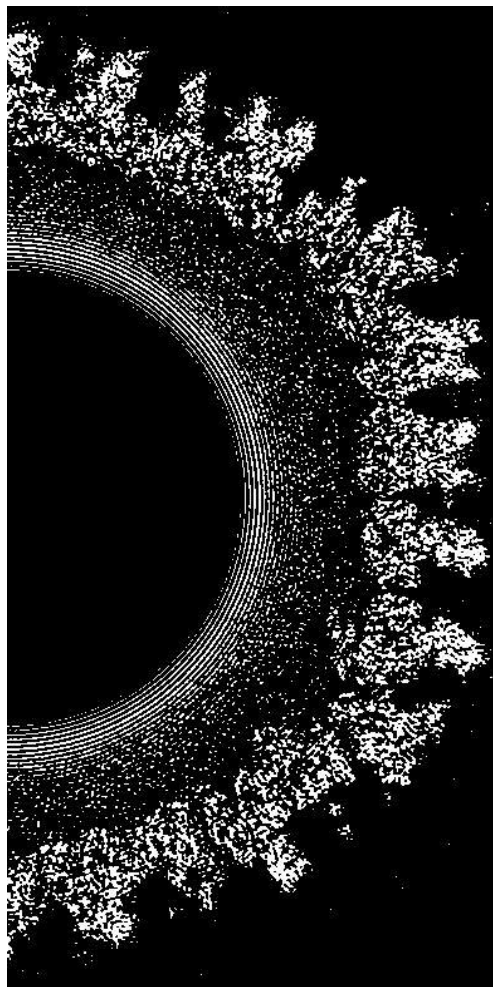

(b) Y Slice 408

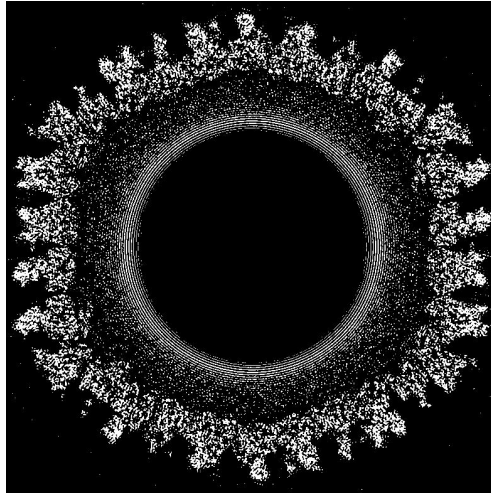

(c) Z Slice 16

Figure 7: Maximum variance slices in the three dimensions of the raw mask

The following table shows the variation of the mass enclosed at different thresholds (see Fig. 8):

Threshold	Voxel mass	Molecular mass(kDa)	# Aminoacids
3.5840	66570384.00	83881.72	762561.07
7.1680	43132402.00	54348.79	494079.93
10.7520	27627169.00	34811.49	316468.11
14.3360	17000442.00	21421.33	194739.38
17.9201	9933593.00	12516.78	113788.91
21.5041	5496706.00	6926.10	62964.55
25.0881	2902479.00	3657.26	33247.78
28.6721	1501475.00	1891.93	17199.34
32.2561	793292.00	999.58	9087.13
35.8401	437345.00	551.07	5009.77
39.4241	261006.00	328.88	2989.81
43.0081	164363.00	207.10	1882.77
46.5921	102328.00	128.94	1172.16
50.1761	57941.00	73.01	663.71
53.7602	29284.00	36.90	335.45
57.3442	12505.00	15.76	143.24
60.9282	4425.00	5.58	50.69
64.5122	1288.00	1.62	14.75
68.0962	295.00	0.37	3.38
71.6802	77.00	0.10	0.88
75.2642	30.00	0.04	0.34
78.8482	24.00	0.03	0.27
82.4322	12.00	0.02	0.14
86.0163	2.00	0.00	0.02

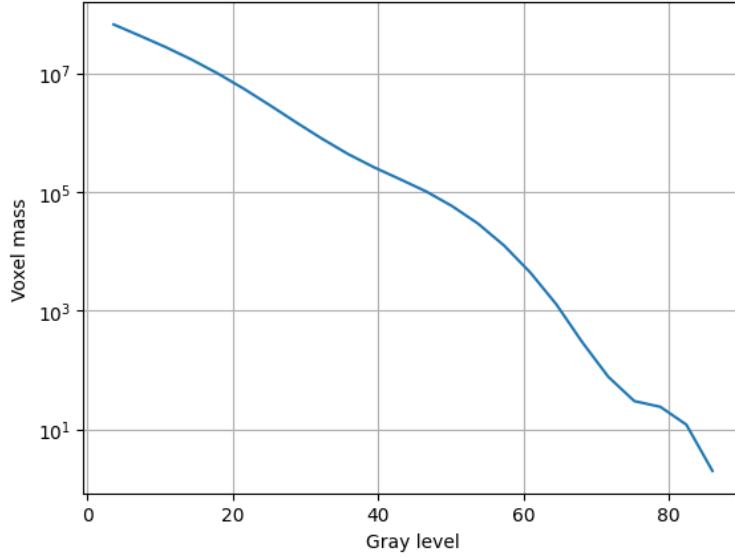


Figure 8: Voxel mass as a function of the gray level.

Constructed mask: After keeping the largest component of the previous mask and dilating it by $2\text{\AA}$, there is a total number of voxels of 48816544 and a volume of $74243861.36 \text{ \AA}^3$. The overlap between the raw and constructed mask is 0.74.

Automatic criteria: The validation is OK if 1) to keep 95% of the mass we need to keep at most 5 connected components; and 2) the average volume of the blobs outside the given threshold has a size smaller than $5\text{\AA}^3$; and 3) the overlap between the raw mask and the mask constructed for the analysis is larger than 75%.

WARNINGS: 2 warnings

1. **There might be a problem of connectivity at this threshold because more than 5 connected components are needed to reach 95% of the total mask. Probably a smaller threshold will not cause this issue.**
2. **There might be a problem in the construction of the mask, because the overlap is smaller than 0.75. A common reason is that the suggested threshold causes too many disconnected**

components.

2.3 Level 0.c Background analysis

Explanation:


Background is defined as the region outside the macromolecule mask. The background mean should be zero, and the number of voxels with a very low or very high value (below 5 standard deviations of the noise) should be very small and they should be randomly distributed without any specific structure. Sometimes, you can see some structure due to the symmetry of the structure.

Results:


The null hypothesis that the background mean is 0 was tested with a one-sample Student's t-test. The resulting t-statistic and p-value were -171.21 and 0.000000, respectively.

The mean and standard deviation (sigma) of the background were -0.075968 and 6.150240. The percentage of background voxels whose absolute value is larger than 5 times the standard deviation is 0.49 % (see Fig. 9). The same percentage from a Gaussian would be 0.000057% (ratio between the two percentages: 8536.542770).


Slices of the background beyond 5*sigma can be seen in Fig. 9.

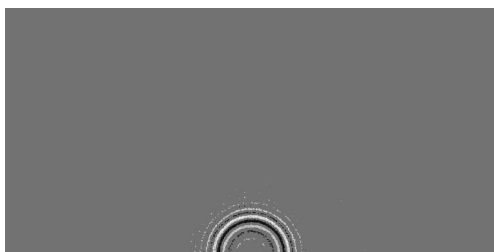

(a) X Slice 584

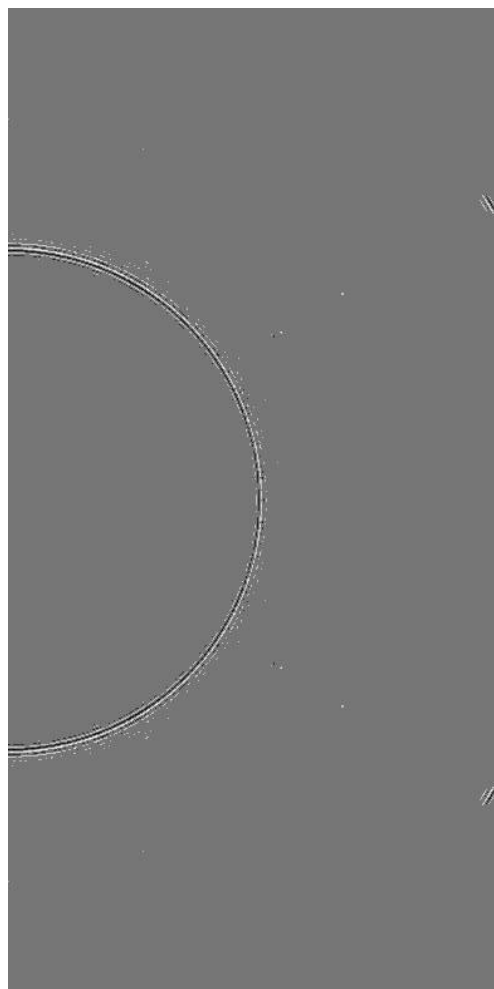

(b) Y Slice 392

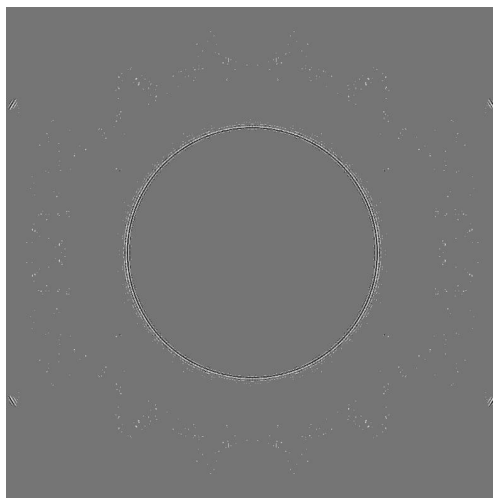

(c) Z Slice 0

Figure 9: Maximum variance slices in the three dimensions of the parts of the background beyond 5σ

Automatic criteria: The validation is OK if 1) the p-value of the null hypothesis that the background has 0 mean is larger than 0.001; and 2) the number of voxels above or below 5 sigma is smaller than 20 times the amount expected for a Gaussian with the same standard deviation whose mean is 0.

WARNINGS: 2 warnings

1. **The null hypothesis that the background mean is 0 has been rejected because the p-value of the comparison is smaller than 0.001**
2. **There is a significant proportion of outlier values in the background (cdf5 ratio=8536.54)**

2.4 Level 0.d B-factor analysis

Explanation:

The B-factor line (see this [link](#) for more details) fitted between $15\text{\AA}$ and the resolution reported should have a slope that is between 0 and $300\text{ \AA}^2$.

Results:

Fig. 10 shows the logarithm (in natural units) of the structure factor (the module squared of the Fourier transform) of the experimental map, its fitted line, and the corrected map. The estimated B-factor was 30.2. The fitted line was $\log(|F|^2) = 7.5/R^2 + (-7.4)$.



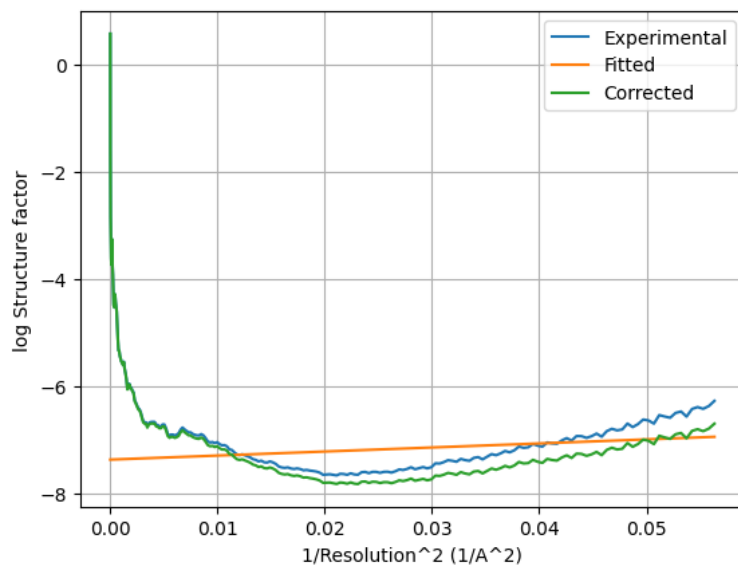



Figure 10: Guinier plot. The X-axis is the square of the inverse of the resolution in Å.

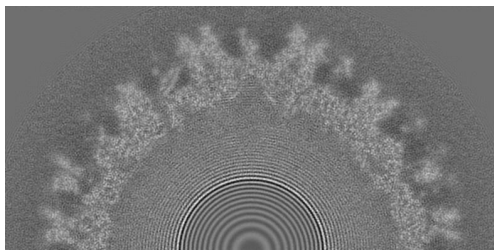

(a) X Slice 229

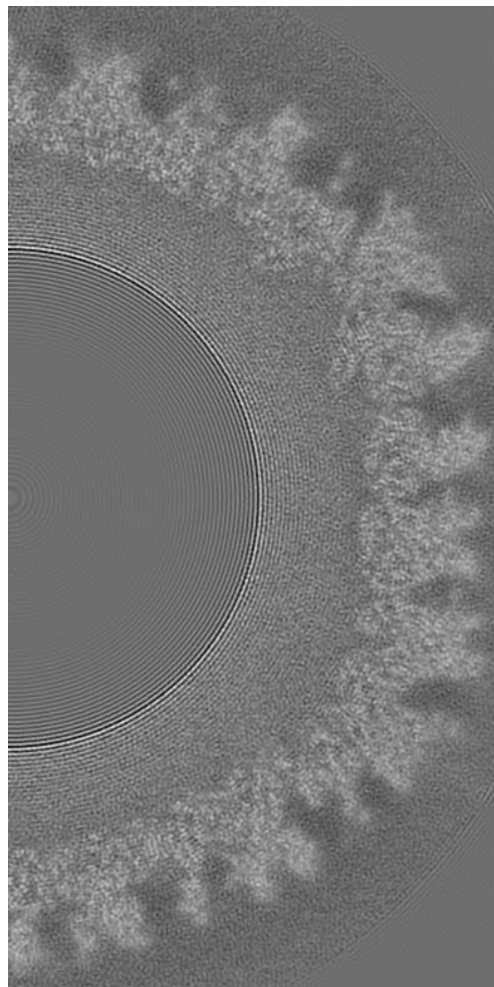

(b) Y Slice 377

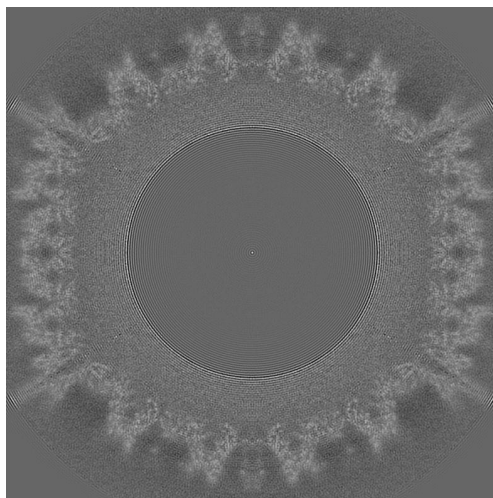

(c) Z Slice 0

Figure 11: Slices of maximum variation in the three dimensions of the B-factor corrected map

Automatic criteria: The validation is OK if the B-factor is in the range $[-300,0]$.

WARNINGS: 1 warnings

1. **The B-factor is out of the interval $[-300,0]$. It is oversharpened.**

2.5 Level 0.e Local resolution with DeepRes

Explanation:

DeepRes (see this [link](#) for more details) measures the local resolution using a neural network that has been trained on the appearance of atomic structures at different resolutions. Then, by comparing the local appearance of the input map to the appearance of the atomic structures a local resolution label can be assigned.

Results:

Fig. 12 shows the histogram of the local resolution according to DeepRes. Some representative percentiles are:

Percentile	Resolution($\text{\AA}$)
2.5%	3.30
25%	4.00
50%	4.17
75%	4.34
97.5%	4.74

The reported resolution, 4.20 $\text{\AA}$, is at the percentile 54.2. Fig. 13 shows some representative views of the local resolution.





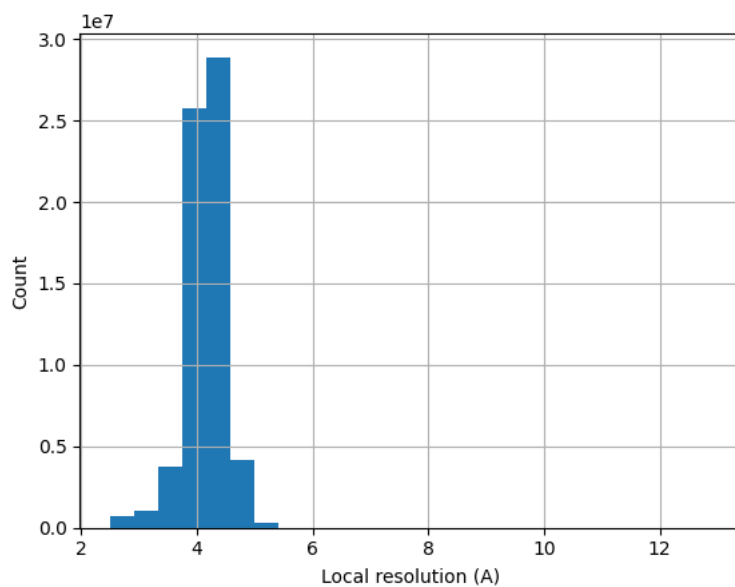



Figure 12: Histogram of the local resolution according to deepres.

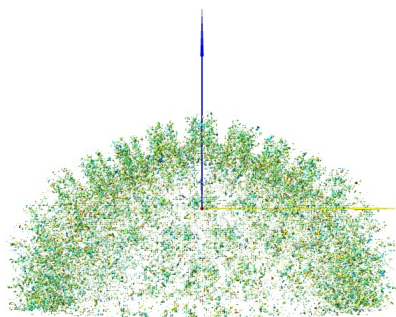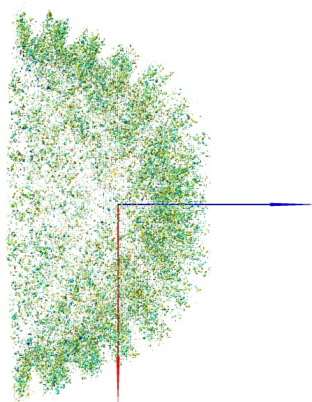

(a) View 1



(b) View 2

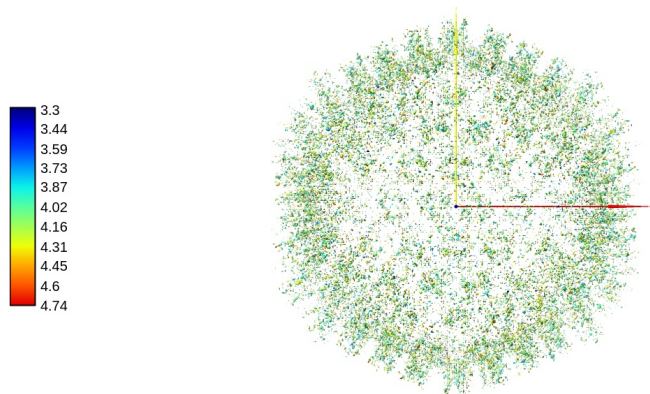

(c) View 3

Figure 13: Local resolution according to DeepRes. Views generated by ChimeraX at a the following X, Y, Z angles: View 1 (0, -90, -90), View 2 (-90, 0, -90), View 3 (0, 0, 0).

Automatic criteria: The validation is OK if the percentile of the user provided resolution is larger than 0.1% of the percentile of the local resolution as estimated by DeepRes.

STATUS: OK

2.6 Level 0.f Local B-factor

Explanation:

LocBfactor (see this [link](#) for more details) estimates a local resolution B-factor by decomposing the input map into a local magnitude and phase term using the spiral transform.

Results:

Fig. [14](#) shows the histogram of the local B-factor according to LocBfactor. Some representative percentiles are:

Percentile	Local B-factor ($\text{\AA}^{-2}$)
2.5%	-266.58
25%	-194.81
50%	-160.12
75%	-125.76
97.5%	-54.75

Fig. 15 shows some representative views of the local B-factor.





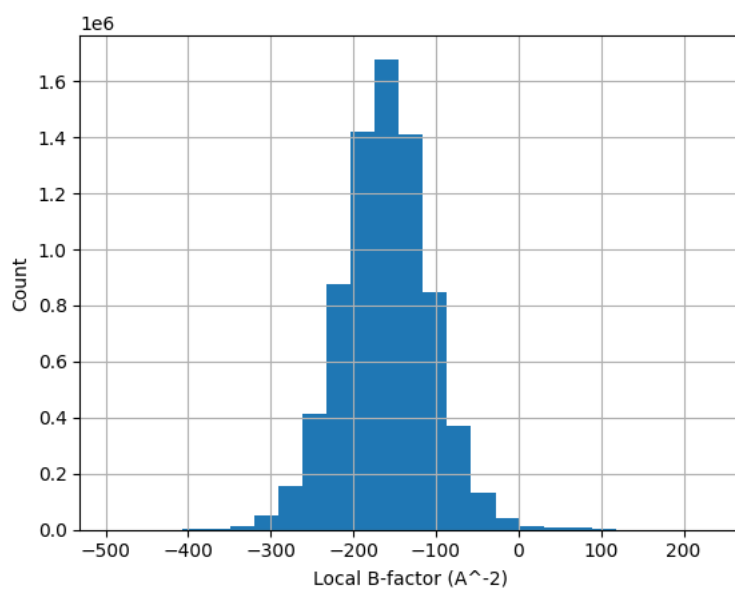



Figure 14: Histogram of the local B-factor according to LocBfactor.

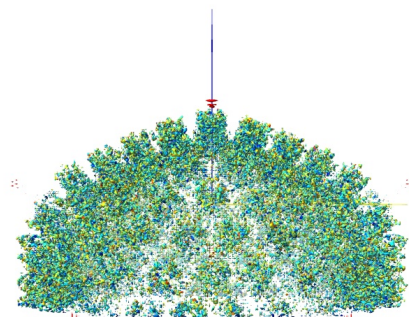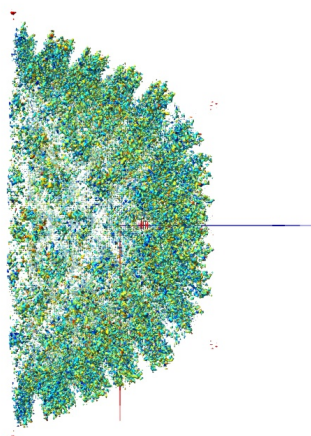

(a) View 1



(b) View 2

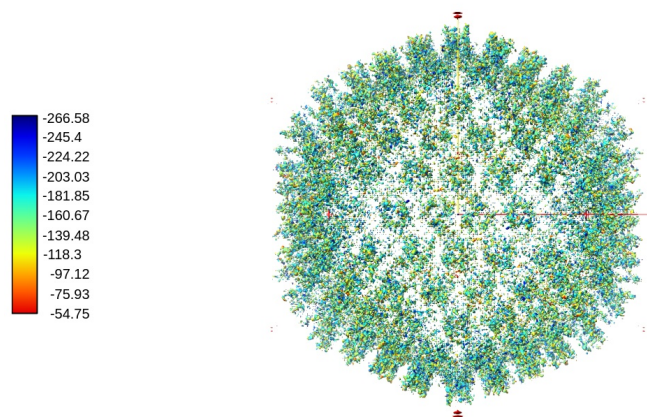

(c) View 3

Figure 15: Local B-factor according to LocBfactor. Views generated by ChimeraX at the following X, Y, Z angles: View 1 (0, -90, -90), View 2 (-90, 0, -90), View 3 (0, 0, 0).

Automatic criteria: The validation is OK if the median B-factor is in the range [-300,0].

STATUS: OK

2.7 Level 0.g Local Occupancy

Explanation:

LocOccupancy (see this [link](#) for more details) estimates the occupancy of a voxel by the macromolecule.

Results:

Fig. 16 shows the histogram of the local occupancy according to LocOccupancy. Some representative percentiles are:

Percentile	Local Occupancy [0-1]
2.5%	0.25
25%	0.66
50%	0.81
75%	0.88
97.5%	0.97

Fig. 17 shows some representative views of the local occupancy.





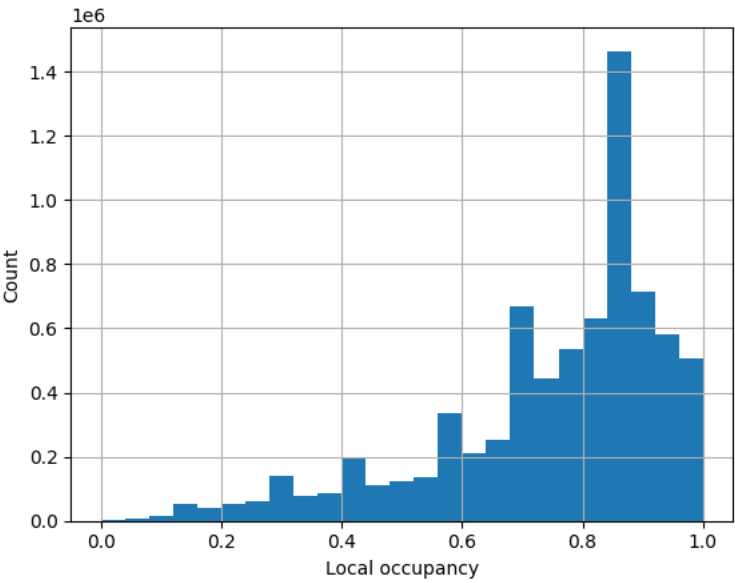



Figure 16: Histogram of the local occupancy according to LocOccupancy.

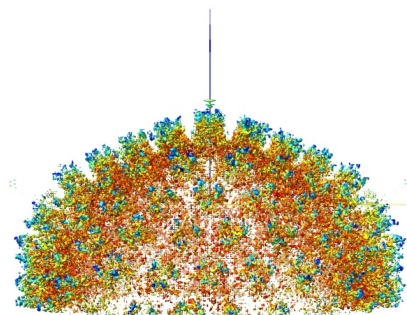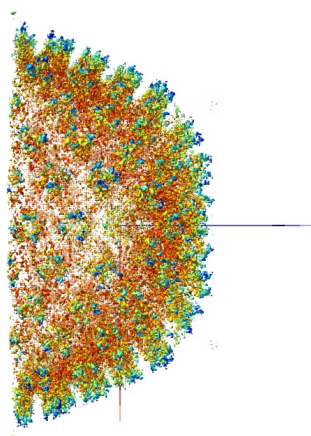

(a) View 1



(b) View 2

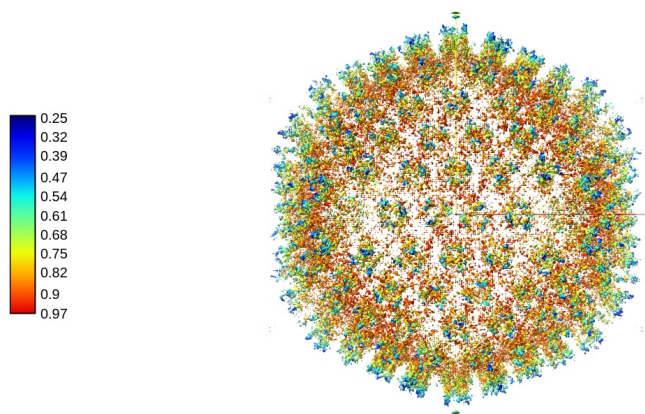

(c) View 3

Figure 17: Local occupancy according to LocOccupancy. Views generated by ChimeraX at the following X, Y, Z angles: View 1 (0, -90, -90), View 2 (-90, 0, -90), View 3 (0, 0, 0).

Automatic criteria: The validation is OK if the median occupancy is larger than 50%.

STATUS: OK

2.8 Level 0.h Hand correction

Explanation:

Deep Hand (see this [link](#) for more details) determines the correction of the hand for those maps with a resolution smaller than 5Å. The method calculates a value between 0 (correct hand) and 1 (incorrect hand) using a neural network to assign its hand.

Results:

Deep hand assigns a score of 0.274 to the input volume.

Automatic criteria: The validation is OK if the deep hand score is smaller than 0.5.

STATUS: OK